



MICROTALC® talc


U.S.P & Bacteria Controlled Talcs

Specialty Minerals Inc. (SMI) MICROTALC® talc U.S.P. and Bacteria Controlled talc produced by Barretts Minerals Inc., from an extensive deposit of high quality Montana talc (Magnesium Silicate)ore. Our MICROTALC® talc U.S.P. talc products are certified to meet all of the United States Pharmacopoeia requirements for chemical and microbiological purity. In addition, SMI's MICROTALC® talc U.S.P. and Bacteria Controlled (BC) talcs conform to the requirements of the Cosmetic Manufacturers Association for maximum limits on arsenic, lead and heavy metals.

MICROTALC® U.S.P. and BC talcs are designed for medical, drug and cosmetic formulations, both powder and lotion. Talc's softness, oleophilic surface and fragrance retention characteristics make them ideal materials for these applications. MICROTALC® MP 15-38 U.S.P. talc is used primarily as an ingredient in drug and OTC tableting formulations where it acts as a binder and mold release agent. MICROTALC® MP 60-30 U.S.P. and MP 98-30 U.S.P. talcs are used in cosmetic and medicinal applications as a dusting powder, a solid diluent or as a solid component in lotions.

Typical Properties	MP 15-38 U.S.P.	MP 60-30 U.S.P.	MP 98-30 U.S.P.
Median Particle Size (microns)	2.0	5.5	6.5
Hegman Fineness (minimum)	5.75	-	-
Retention, 325 Mesh, %	-	2.3	-
Retention, 200 Mesh, %	-	-	3.5
Dry Brightness (Hunter Y, Rd Value)	89	87	86
Bulk Density (pounds/ft³)	12	22	26
(grams/cc)	0.19	0.37	0.42
Tap Density (pounds/ft³)	33	50	52
(grams/cc)	0.53	0.80	0.84
pH	8.8	8.8	8.8
Specific Gravity	2.8	2.8	2.8
U.S.P. Certification Limits		Cosmetics Manufacturers Association Limits	
Loss on Ignition	6.5% Maximum	Lead (Pb)	10 ppm Maximum
Acid Solubles	2% Maximum	Arsenic (As)	3 ppm Maximum
Water Solubles	0.1% Maximum	Heavy Metals	40 ppm Maximum
Water Soluble Iron	Nil		
Microbiological Limit	500 per gram		

Typical Chemical Composition		
Silicon Dioxide	SiO ₂	61%
Magnesium Oxide	MgO	31%
Calcium Oxide	CaO	<0.5%
Aluminum Oxide	Al ₂ O ₃	1%
Iron As	Fe ₂ O ₃	<1.3%
Loss on Ignition	L.O.I.	5.5%
Moisture %	H ₂ O	<0.5%
(% weight loss @ 110° C)		

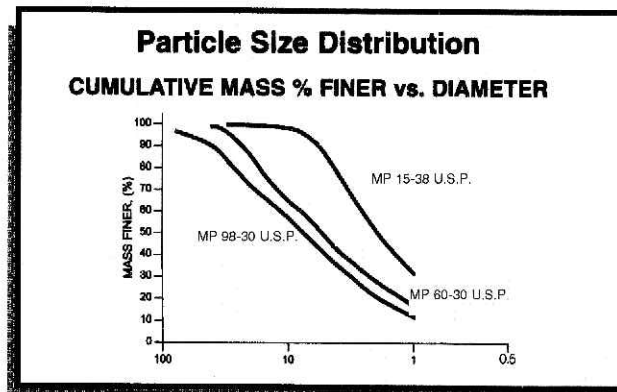

All products are sold on the understanding that the user is solely responsible for determining their suitability for the intended use. All information given and recommendations made herein are based upon our research and are believed to be accurate, but no guarantee, either expressed or implied, is made with respect thereto or with respect to the infringement of any patent. SMI MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OF THE PRODUCTS DESCRIBED HEREIN. Inconsistent terms and conditions contained in Buyer's purchase order shall not be binding on SMI/BMI unless reflected in writing signed by SMI/BMI's representative. This information is not to be copied, used in evidence, released for publication or public distribution without written permission from Specialty Minerals Inc./Barretts Minerals Inc.